

DTSP-600

IP65 with 30-Point P-CAP Multi-Touch

32 inches Touch Monitor




DTSP-600

Slim Bezel Design

→ 20mm ←

Up to 30 Points Multi-Touch support
2 Points Hover Touch (6mm glass with gloves)

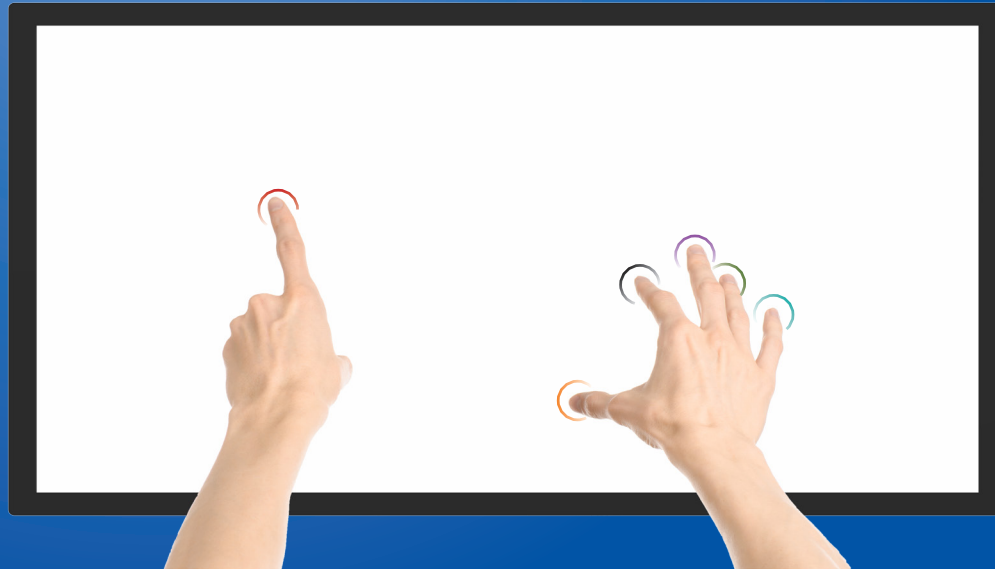


Interface Protect Cover




Features

Multiple Video Interfaces (HDMI, VGA, Display Port) and Touch Function Support

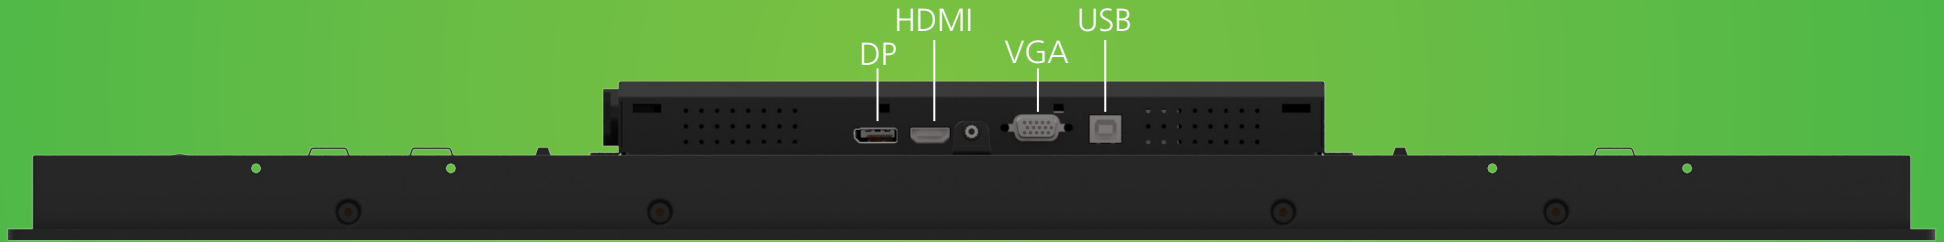

Bracket Mount for Landscape or Portrait

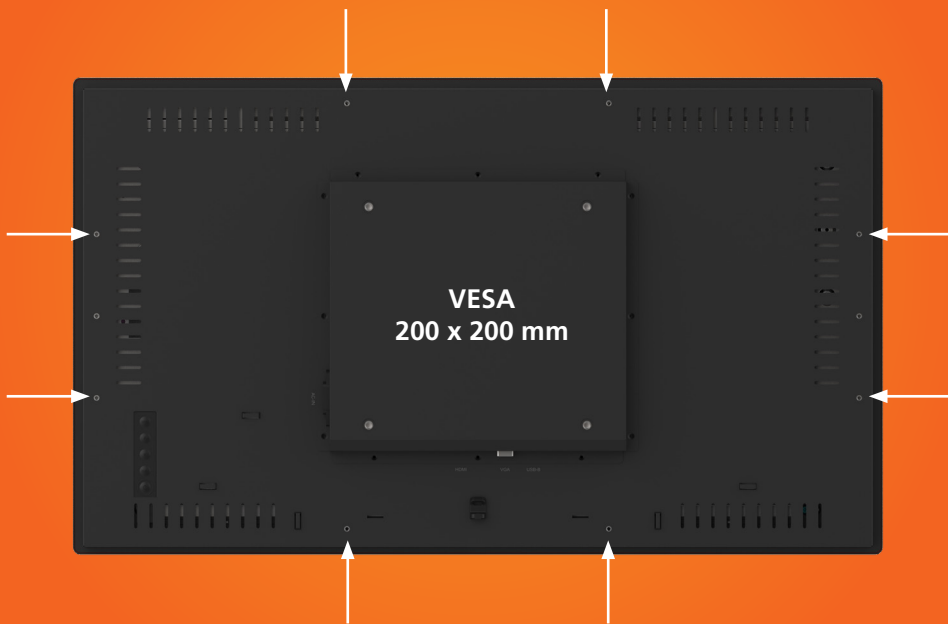


IP65 Rating High Contrast Panel



Specification

KD-3200	
Size	31.5" TFT LCD
Maximum Resolution	1920 x 1080
Contrast Ratio	3000:1
Brightness (Backlight Type)	500 nits (No Touch), 450 nits (P-CAP)
View Angle	H:178°, V:178°
Touch LCD Display	
Touch Type	Projected Capacitive
Touch points	30 points Touch (windows)
Hover Touch	2 points 6mm glass / gloves 5pts
Touch Screen Interface	USB-HID (Type B)
I/O Port	
Serial Port	-
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA, 1 x DP, 1 x HDMI 1.3 (up to 1920 x 1080 @ 60)
Audio Port	-
Power Input	1 x AC Power Inlet
Physical Properties	
Power Supply	60W Internal Power Adaptor
Housing Color	Black
Material	Glass, SECC Metal
Compliance	Front Panel IP65 Compliant
Dimensions (W x H x D) mm	739.4 x 433.85 x 61mm
Net Weight (kg)	10.35 kg
Gross Weight (kg)	12.85 kg
Carton (W x H x D) mm	890 x 155 x 630 mm
VESA	200 x 200 mm
Safety	
Certifications	CE, CB, FCC, UL, CCC
Environment	
Operating Temperature / Operating Humidity	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature / Storage Humidity	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing

Dimension

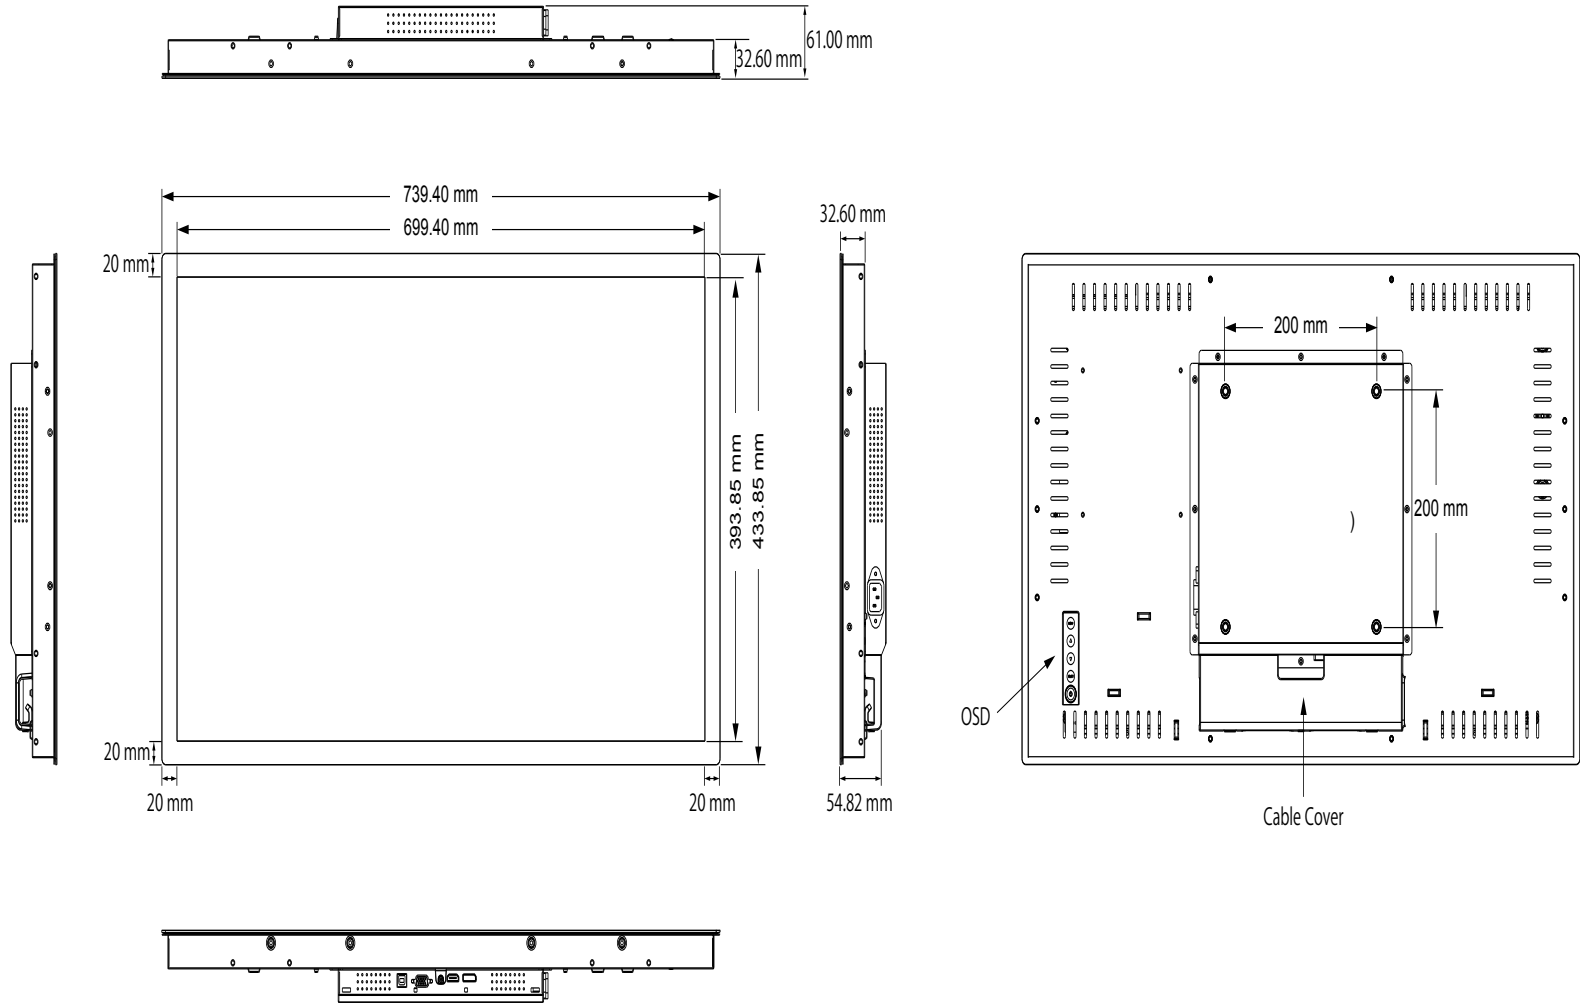

DURANMATIC®

your reliable partner

POINT OF SALE