

VariPOS

Smart Dual Hinged design
for the ultimate flexibility

250A / 270A



red**dot** winner 2020





Features

Flexibility meets demand with dual hinged stand allowing extreme tilt

Easy adjustment providing a solid platform allowing extremely flexible height and angle adjustment. The stand can be folded flat or adjusted to any view angle providing maximum comfort and optimal efficiency to the POS operation.

Hidden cable management - keeping everything organized

The Dual Hinge Stand provides hidden cable management channels to organize & reduce clutter when connecting power & accessory cables; the cables are concealed within the stand and covered with a securing plate maintaining the aesthetic look.



Powerful and flexible VariIO I/O Box connectivity


VariPOS 250A / 270A can be combined with the dedicated VariIO I/O Box, offering the standard I/O connections plus Point of Sale specific connections for multiple projects.



Simplified installation and serviceability

VariIO I/O Box connected by a single custom high speed USB Type C connector can easily be disconnected leaving the I/O and peripherals in place. (PE19)

Detailed Features

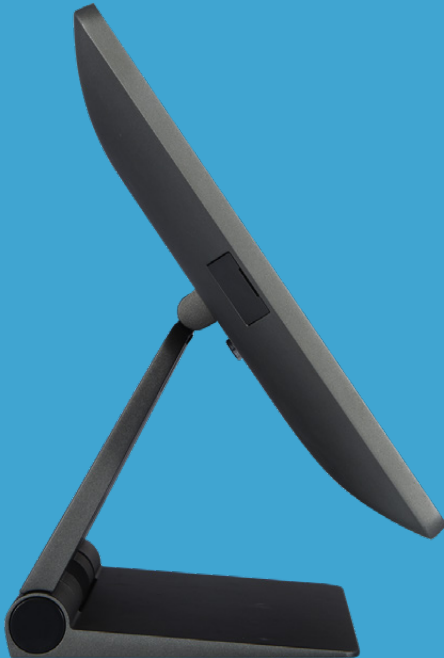

- Intel® Alder Lake 12th Gen. Core i3/i5 CPU.
- True flat 15" 4:3 LCD, 400 nits / 17" 5:4 LCD, 400 nits (LED backlight) with IP66 protection.
- Dual Hinged Stand for Maximum Flexibility (Supports Any Angle from Flat/Low Profile to 62°/PPC 150°). Secure Base attachment (75 x 75) to surface.
- Hidden Cable Management channels organize & reduce clutter when connecting accessory cables.
- Extendable I/O capability to meet any project specification (Optional).
- Peripheral compatibility across the whole VariPOS 2 Series: 2D Scanner, RFID, MSR, iButton & Fingerprint.

Ordering Information

VariPOS 250A/270A (Optional VariIO I/O Box-PE19)

PE24

- Intel® Celeron™ Intel® Elkhart Lake Celeron® 2.60GHz CPU

PE26

- Core i5 Intel® Alder Lake-P Platform Core i5 1.3GHz up to 4.4 GHz
- Core i3 Intel® Alder Lake-P Platform Core i3 1.2GHz up to 4.4 GHz



Multi-touch Screen



Dual Hinged Stand



Quick & Easy Maintenance



Extendable VariIO I/O Box
Custom Type C connector



Waterproof - IP66 on Front Panel



Specification


Model Name		• VariPOS 250A/270A (PE24)	• VariPOS 250A/270A (PE26)
Main Board	Processor	Intel® Celeron	Intel® Alder Lake-P Platform Core i5 Intel® Alder Lake-P Platform Core i3
	Chipset	CPU Integrated	
	System Memory	1 x SO-DIMM DDR4 slot, 4GB RAM as standard. Max. memory support up to 16 GB.	1 x 8GB DDR5 SO-DIMM memory (Max.support up to 32GB)
	TPM	Intel F/W	
	Intel AMT	N/A	i5 only
Display & Touch	LCD Size	15" - 4:3 / 17" - 5:4 TFT LCD (LED backlight)	
	Brightness	400 nits	
	Resolution	15" - 1024 x 768 (4:3) / 17" - 1280 x 1024 (5:4)	
	Touch	True Flat Projected Capacitive Technology	
Storage	HDD/SSD	1 x SATA III (2.5") or M.2 Storage (Option)	
Panel I/O	LAN Port	1 x Gigabit Ethernet by RJ-45	
	USB Port	3 x USB 2.0, 3 x USB 3.1	
	Speaker	HD Audio, 2W Speaker x 2	
	Power Switch	1 x power on/off button	
	COM Port	2 x RJ48 (Support DC+0/5/12v by BIOS setting, default setting is 0v)	
	Cash Drawer	1 x RJ11 (Support DC+12v or +24v (default)) port supports 2 cash drawers	
	DC Input	1 x Mini Din 4P (DC+19v only)	
	Type C	1 x Type C (PD+DP)	
VariIO I/O Box & Expansion (Optional)	Cash Drawer	1 x RJ-11 (Support DC +12V or +24V (default)) port supports 2 cash drawers	
	LAN Port	1 x Gigabit Ethernet by RJ-45	
	USB Port	2 x USB 3.0; 4 x USB 2.0	
	Powered USB Port (Project Based)	2 x DC+12v Powered USB 1 x DC+24v Powered USB	
	COM Port	4 x RS-232 (jumper setting, support DC+0/5/12v, default setting is 0v)	
	Type C	1 x Type C	
OS Support		Windows 10 (64bit) / Windows 11 (64bit) / Linux	
Power Adapter (External adapter)		Voltage:+19VDC, Std. 65 watt *PUSB will use 180 watt adapter	Voltage:+19VDC, Std. 90 watt *PUSB will use 180 watt adapter
Compliance	Certifications	CE, FCC, LVD, RoHS	
Material		Main Unit: Die-Cast Aluminum	
Color		Main Unit: Space Gray / Black	
Dimension (W x H x D mm)		15" - 365.893 x 281.89 x 43.23 (PPC) / 17" - 396.93 x 329.47 x 42.75 (PPC)	
Environmental Condition	Operating	0°C ~ 40°C, 10% ~ 90% RH, non-condensing	
	Storage	-20°C ~ 60°C, 10% ~ 90% RH, non-condensing	

Model Name		• VariPOS 250A/270A (PE24)	• VariPOS 250A/270A (PE26)
Optional Accessories	MSR	ISO 3-Tracks Slim MSR USB Type	
	iButton	Dallas Key Reader, USB Type	
	RFID	13.56Mhz USB Type	
	Fingerprint	Digital Persona U.are.U 4500 Module USB Type	
	Scanner	2D scanner, USB Type	
	2nd Display	10.1" Resolution 1280 x 800 (16:10 wide screen) USB Type, with or without True-flat P-cap 10 point Multi-touch	
	LCM	2x20 USB Type	


* The right has been reserved to change the specification without prior notice.

Dimensions

VariPOS 250A (15")

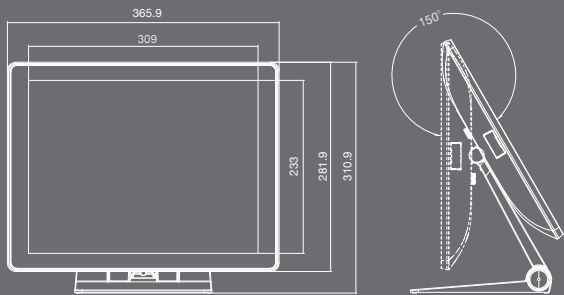


VariPOS 270A (17")

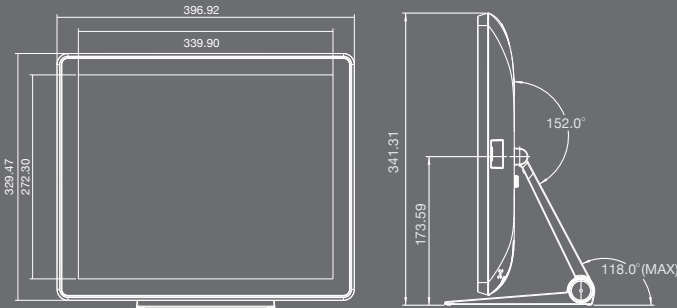


Panel PC IO Interface

VariPOS 250A/270A (Elkhart Lake-PE24 / Alder Lake-PE26)

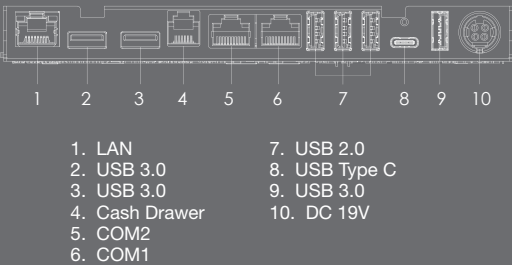

VariI/O Box

(PE19)

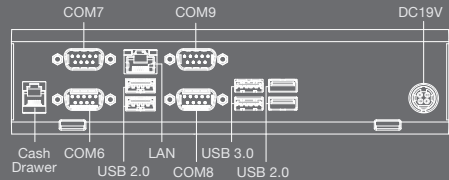



Poindus Systems Corp. Headquarters | www.poindus.com

5F, No.59, Ln. 77, Xing-Ai Rd., Neihu Dist., Taipei City 114, Taiwan. R.O.C

☎ + 886 27721 4688

🖨 + 886 27721 2289

✉ sales@poindus.com

Germany

ADASYS GmbH Elektronische Komponenten
Max-Planck-Str. 10 70806 Kornwestheim

☎ + 49 7154 83000

🖨 + 49 7154 8300 599

✉ info@adasys.de

UK

12 Chancerygate Business Centre, Whiteleaf Road,
Hemel Hempstead HP3 9HD

☎ + 44 330 555 0081

🖨 + 44 330 555 0082

✉ puk@poindus.com

Spain/Portugal

C/ Los Sueños 14, Polígono Industrial Santa Cruz
29004 Málaga-Spain

☎ +34 956 108 777

✉ info@poindus.es